


## Channel Systems

These products both allow vertical movement whilst offering horizontal restraint. The channel system tends to be face-fixed while the slot is usually cast into concrete. These systems may be used to overcome differences in coursing between masonry leaves.

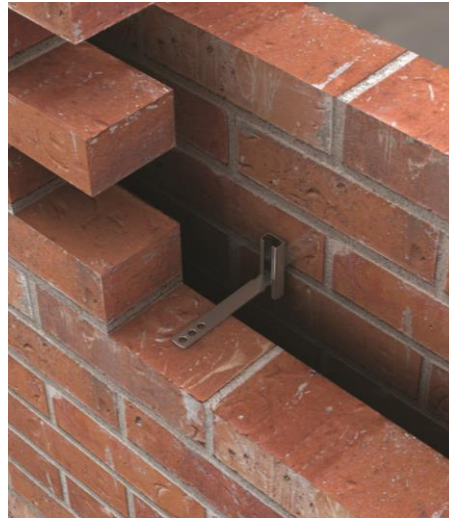

## Product

### VS8 Dovetail Safety Tie

A universal head enables this tie to be used with all V60 channel systems and V29 slot to restrain brickwork.

Sizes:

75mm	200mm
100mm	225mm
125mm	250mm
150mm	275mm
175mm	300mm

## Performance

VS8 75mm-300mm	
Tensile Load (cast in V29)	<b>2960N</b>
Tensile Load (surface 28/15)	<b>5284N</b>
Tensile Load Mortar End	<b>5636N</b>
VS8 75mm-200mm	
Compressive Load Capacity	<b>4896N</b>
VS8 200mm-300mm	
Compressive Load Capacity	<b>1470N</b>

### Safety Precautions

VS8 Dovetail Safety Ties are manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.