



Declaration of Performance

Identification Code: SPE 150-300mm

Meeting the requirements of Annex **ZA, EN 845-1:2013+A1:2016**

Description of Use:


Asymmetrical movement tie used to connect two leaves of masonry whilst allowing horizontal movement.

Testing Body:

Lucideon Ltd
Queens Road
Penkull
Stoke on Trent
ST4 7QL

Notification Body No:

1289

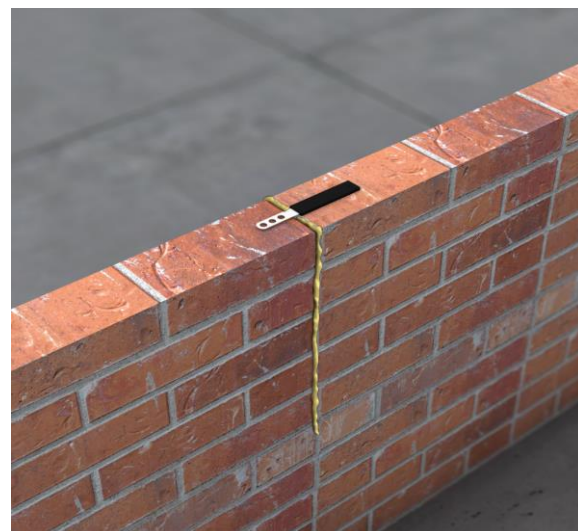

Performance:

Shear Load Capacity:	2060N
Water Shedding Capacity:	N/A
Durability:	Material coating reference 3
Dangerous Substance:	N/A
Minimum Embedment:	62.5mm
Minimum Mortar Joint:	10mm



Authorised Signature

Philip Travis, Managing Director
1st March 2017, Whalley Bridge