
vista NEUTRAS-1 Low Thermal Conductivity Tie

Masonry to Masonry Wall Ties

These products act to secure two leaves of a cavity wall to each other, allowing them to act as one structurally. A cavity tie usually incorporates some mechanism, (usually a change of shape) to discourage moisture moving across the tie. Most cavity ties are available with a dedicated clip to secure insulation (usually in sheet form) within the cavity



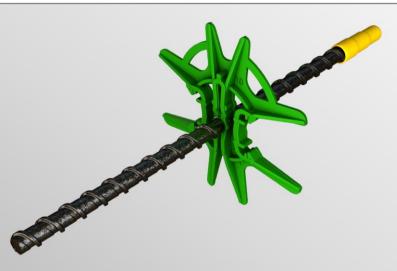

Product

NEUTRAS-1 Low Thermal Conductivity Tie

The basalt fibre composite Neutras wall tie is an extremely versatile product and has been designed to serve as a uniquely adaptable substitute for traditional steel ties. Neutras wall ties have both low thermal conductivity and high structural performance levels.

Features

- High Specific tensile strength 4-6 times higher than
- Excellent corrosion resistance (never rusts)
- Low thermal conductivity of 0.65W/mK, which is 15-20 times lower than stainless style
- High compressive strength compared to conventional FRP materials
- Non-magnetic and electrically non-conductive

Testing

- Tested for strength in tension, compression, thermal conductivity and fire conditions
- Tested in 60min fire conditions by BRE materials
- Meets technical requirements of NHBC
- Thermal conductivity by the Imperial College (London)
- · Tested to BS EN 845-5:2000 by Lucideon in Stoke-on-Trent (results below)

NEUTRAS-1-275 for up to 150mm Cavity	
M2 Mortar used	
Tension	2540N
Compression	3470N
M12 Mortar used	
Tension	7290N
Compression	5080N

Safety Precautions

NEUTRAS ties may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.

Head Office: Vista Engineering Ltd, Carr Brook Works, Elnor Lane, Whaley Bridge, High Peak SK23 7JN

Tel: Sales: +44 (0) 1663 736 700 Fax: +44 (0) 1663 736 710

Scotland Office: Vista Engineering Ltd, 79 Dunn Street, Parkhead, Glasgow, G40 3PA Tel: +44 (0) 141 613 3144 Fax: +44 (0) 141 613 3031

email: sales@vistaeng.co.uk web: www.vistaeng.co.uk

