


# Vista V98 Dovetail Wire Tie

## **Channel Systems**

These products allow vertical movement whilst offering horizontal restraint. The channel system tends to be face-fixed while the slot is usually cast into concrete. These systems may be used to overcome differences in coursing between masonry leaves.



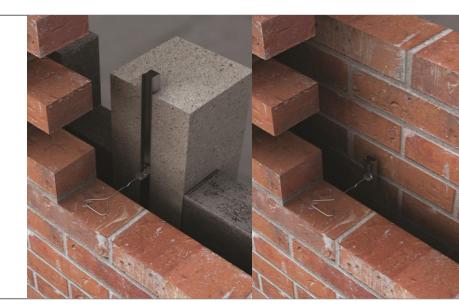

#### **Product**

### **V98 Dovetail Wire Tie**

A universal head enables this tie to be used with all Vista channel systems to restrain brickwork. The wire section allows for extra movement.

#### Sizes (Projection):

100mm 200mm

225mm 125mm

250mm 150mm

175mm

## **Performance**

V98 for up to 135mm Cavity	
Tensile Load (cast in V29)	2960N
Tensile Load (surface 28/15)	5284N
Tensile Load Mortar End	2200N
Compressive Load Capacity	1160N

#### Safety Precautions

V98 Dovetail Wire Ties are manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.

Head Office: Vista Engineering Ltd, Carr Brook Works, Elnor Lane, Whaley Bridge, High Peak SK23 7JN

Tel: Sales: +44 (0) 1663 736 700 Fax: +44 (0) 1663 736 710

Scotland Office: Vista Engineering Ltd, 79 Dunn Street, Parkhead, G40 3PA Tel: +44 (0) 141 613 3144 Fax: +44 (0) 141 613 3031

web: www.vistaeng.co.uk

email: sales@vistaeng.co.uk

